

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
Department of Electrical Engineering and Computer Science

6.003: Signals and Systems—Fall 2003

Final Exam

Tuesday, December 16, 2003

Directions: The exam consists of 7 problems on pages 2 to 33 and additional work space on pages 34 to 37. Please make sure you have all the pages. Tables of Fourier series properties, CT and DT Fourier transform properties and pairs, Laplace transform and z-transform properties and pairs are supplied to you as a separate set of pages. **Enter all your work and your answers directly in the spaces provided on the printed pages of this booklet. Please make sure your name is on all sheets. You may use bluebooks for scratch work, but we will not grade them at all.** All sketches must be adequately labeled. Unless indicated otherwise, **answers must be derived or explained**, not just simply written down. This examination is closed book, but students may use three $8\frac{1}{2} \times 11$ sheets of paper for reference. Calculators may not be used.

NAME: _____

Check your section	Section	Time	Rec. Instr.
<input type="checkbox"/>	1	10-11	Prof. Zue
<input type="checkbox"/>	2	11-12	Prof. Zue
<input type="checkbox"/>	3	1- 2	Prof. Gray
<input type="checkbox"/>	4	11-12	Dr. Rohrs
<input type="checkbox"/>	5	12- 1	Prof. Voldman
<input type="checkbox"/>	6	12- 1	Prof. Gray
<input type="checkbox"/>	7	10-11	Dr. Rohrs
<input type="checkbox"/>	8	11-12	Prof. Voldman

Please leave the rest of this page blank for use by the graders:

Problem	No. of points	Score	Grader
1	30		
2	15		
3	35		
4	30		
5	30		
6	25		
7	35		
Total	200		

PROBLEM 1 (30 pts)

Let $h(t)$ be a right sided impulse response of a system and its Laplace transform is given by

$$H(s) = \frac{10(-s + 1)}{(s + 10)(s + 1)}.$$

Part a. Find the differential equation describing the system.

Part b. Is the system causal ?

YES or NO

Brief explanation:

Work Page for Problem 1

Part c. The response of this system to a positive step starts off in a negative direction before turning around. Show this by finding $\lim_{t \rightarrow 0^+} \frac{ds(t)}{dt}$. Justify your method.

$$\lim_{t \rightarrow 0^+} \frac{ds(t)}{dt} = \underline{\hspace{10cm}}$$


Part d. Let $H_I(s)$ be the transfer function of a stable but noncausal inverse system of $H(s)$, i.e., $H_I(s)H(s) = 1$. Find $H_I(s)$ and its region of convergence.

$$H_I(s) = \underline{\hspace{10cm}} \quad \text{ROC:}$$

Work Page for Problem 1

PROBLEM 2 (15 pts)


Consider the DT LTI system shown below:

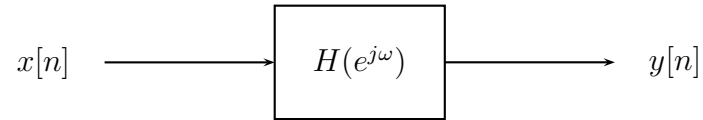


The input sequence is

$$x[n] = \cos\left(\frac{5\pi}{2}n - \frac{\pi}{4}\right)$$


as sketched below:

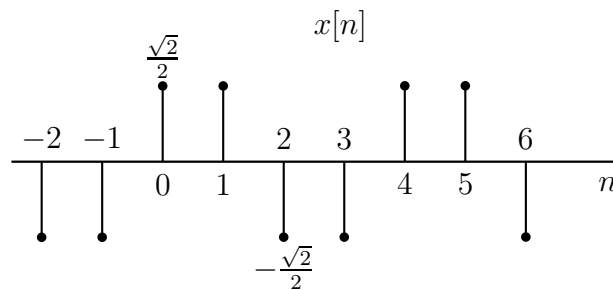

Determine and sketch $y[n]$ if the magnitude and the phase of $H(e^{j\omega})$ are given below:

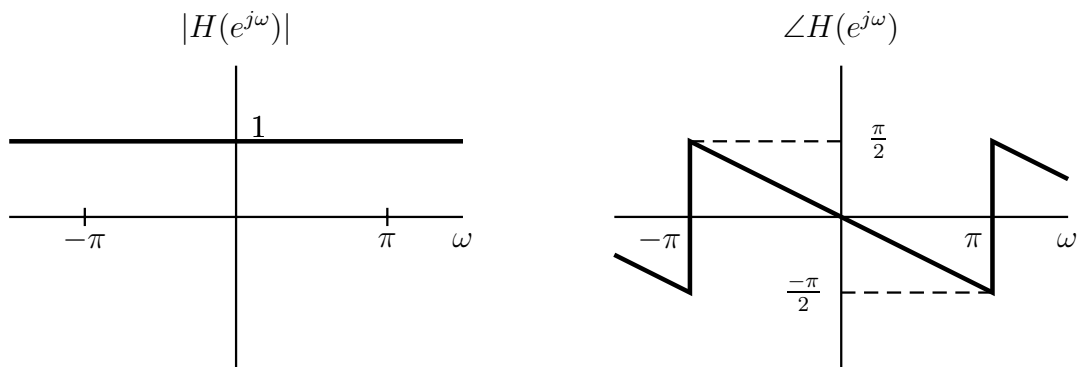


$y[n] =$ _____

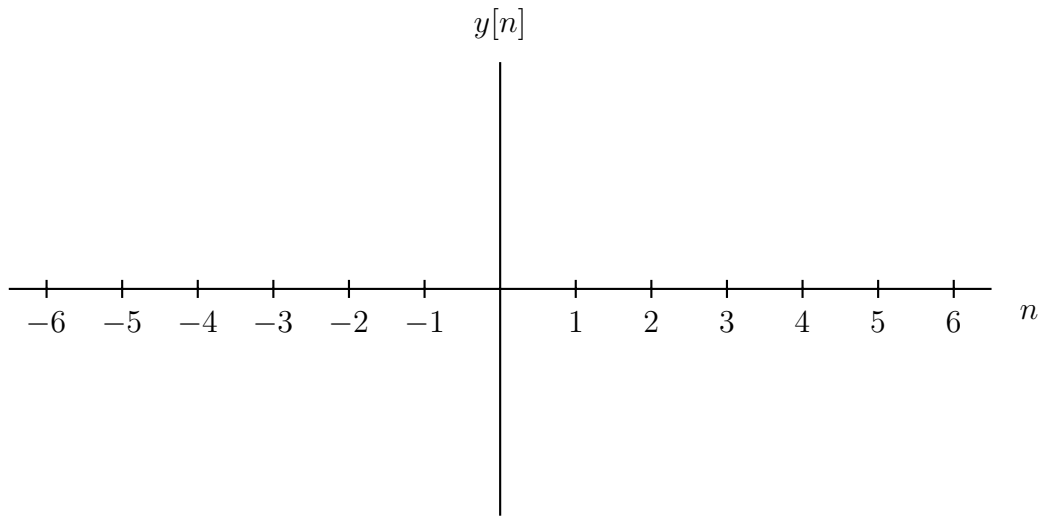


Work Space for Problem 2

PROBLEM 3 (35pts)

Consider the following system:


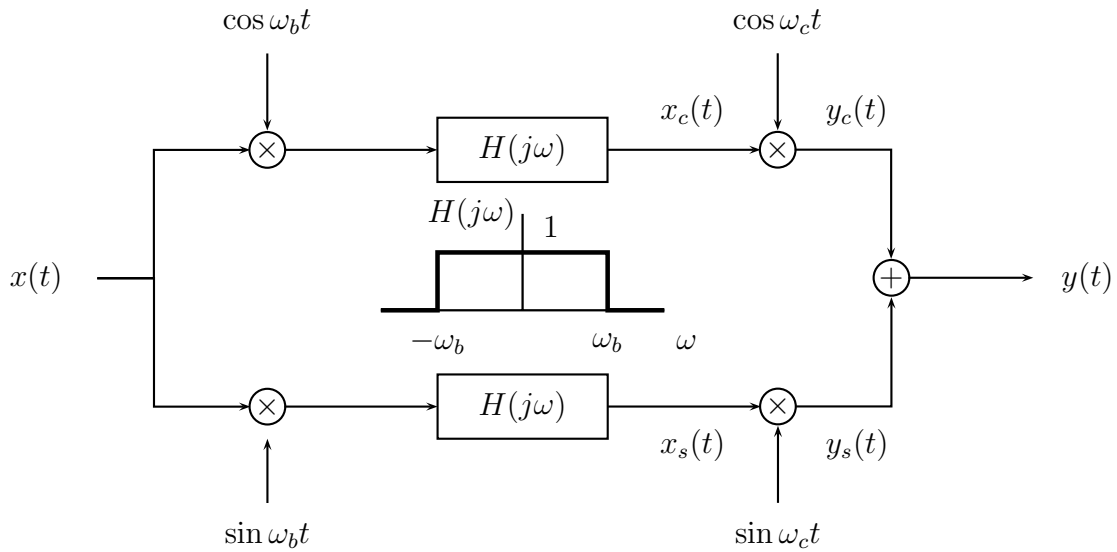


The Fourier transform of $x(t)$, $X(j\omega)$ has real and imaginary parts given below:

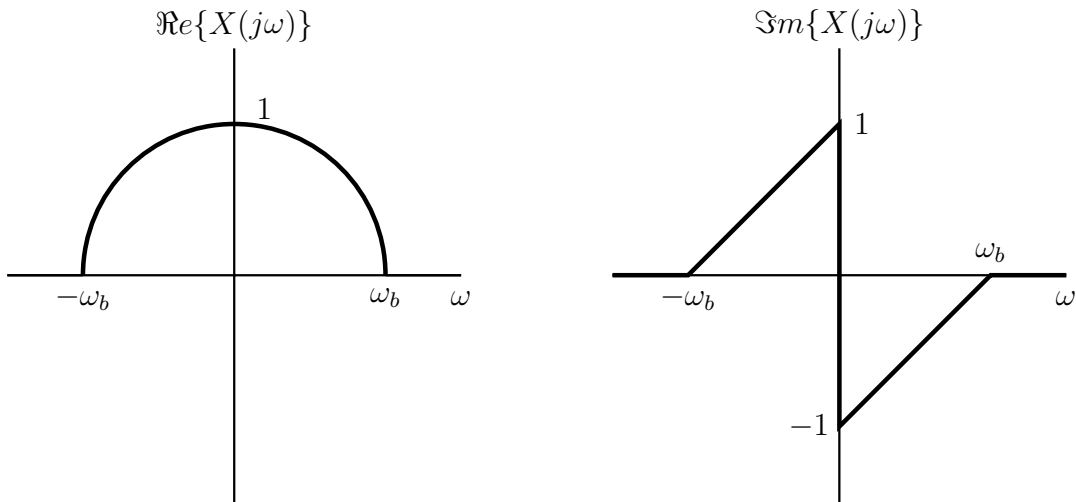



For your convenience, the identical figures above are attached along with the transform tables.

Part a. Provide labeled sketches of the real and imaginary parts of $X_s(j\omega)$.

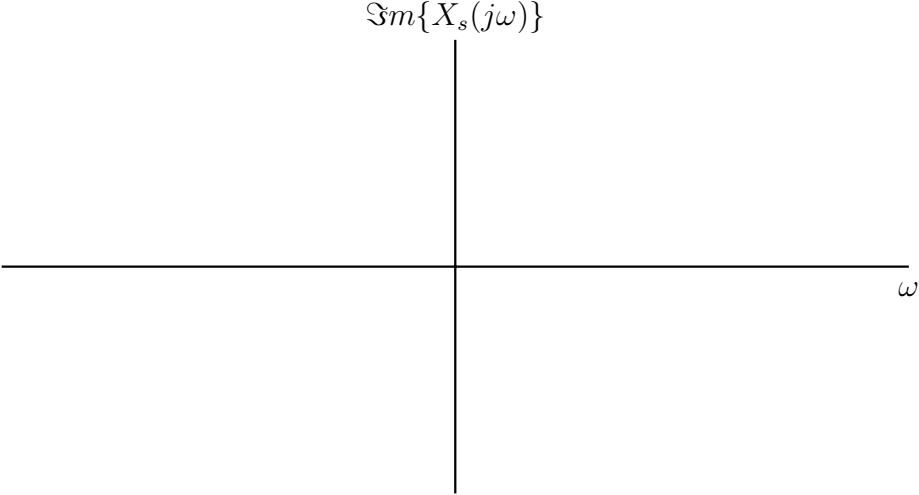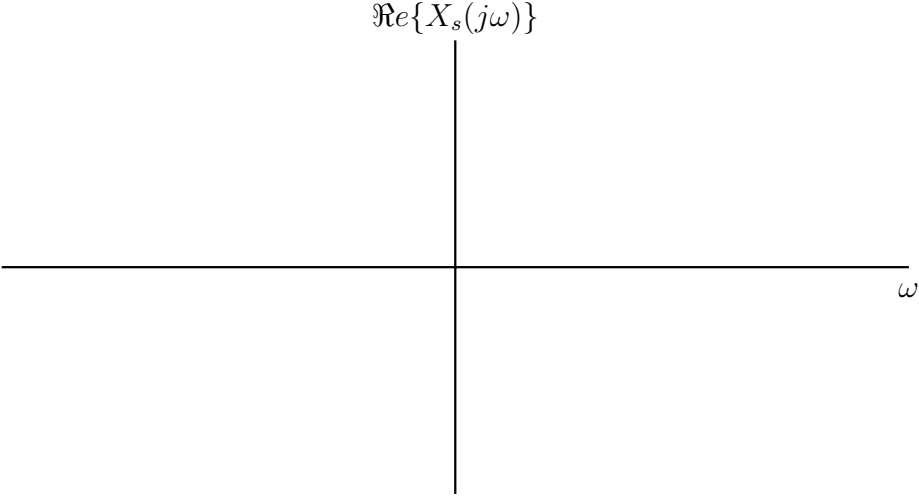


Work Page for Problem 3

Part b. Provide labeled sketches of the real and imaginary parts of $Y_s(j\omega)$.

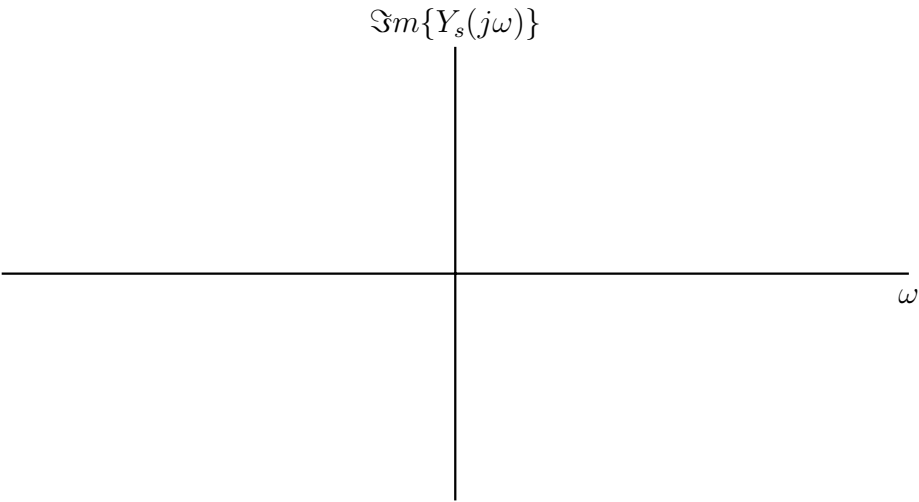
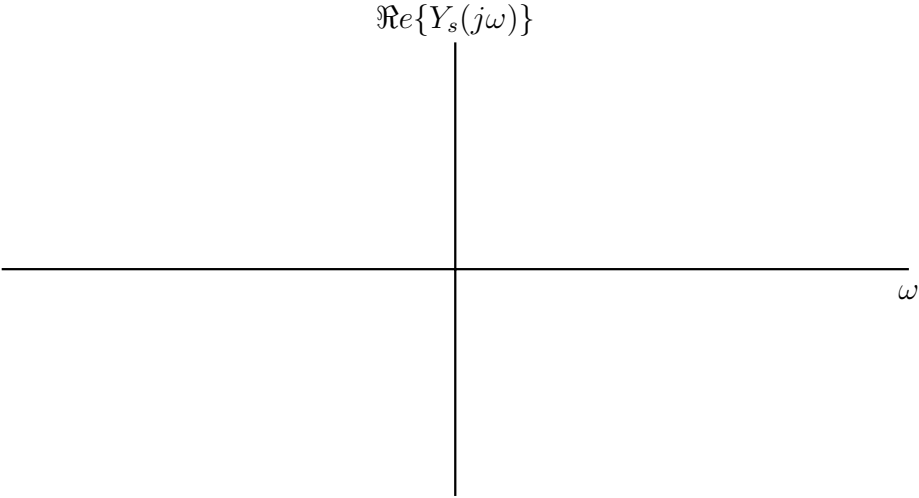


Work Page for Problem 3

Part c. $Y_c(j\omega)$ has real imaginary parts as shown below

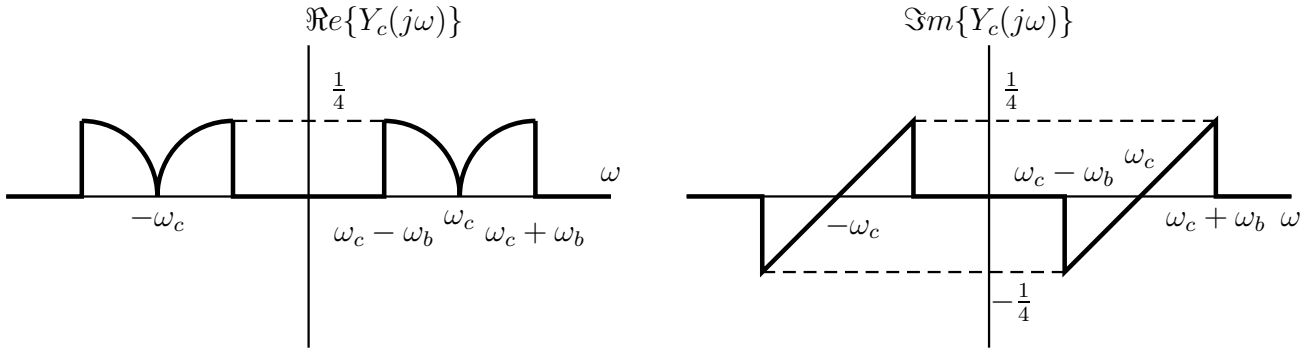

Provide labeled sketches of the real and imaginary parts of $Y(j\omega)$.

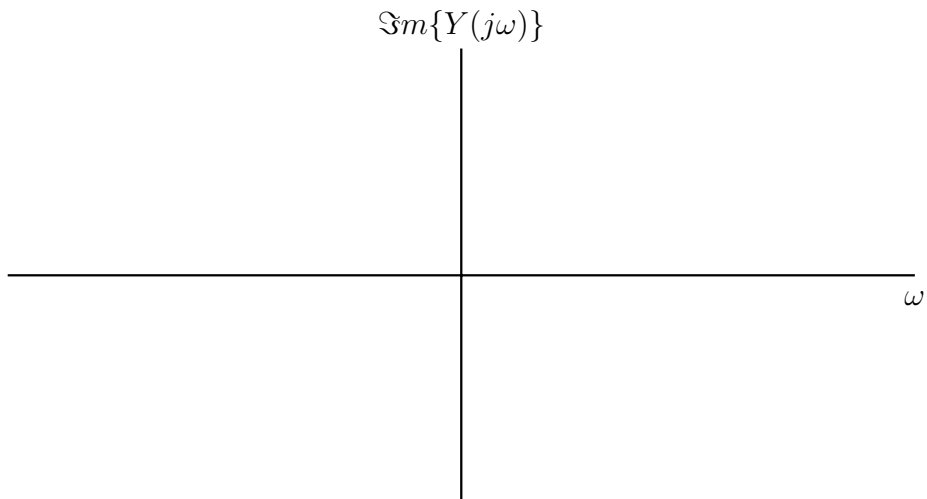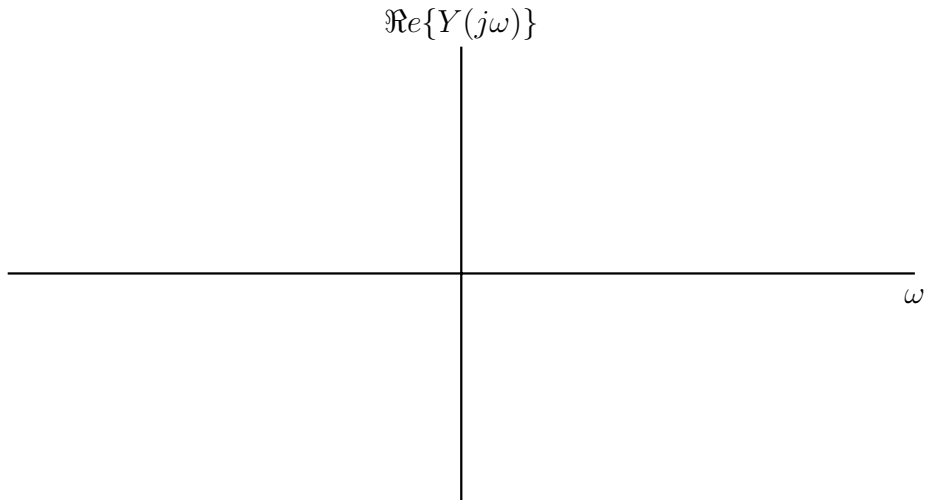


Work Page for Problem 3

Part d. What small change would you make in this system to create a lower sideband modulation ?

Work Space for Problem 3




PROBLEM 4 (30 pts)

Consider the following system:

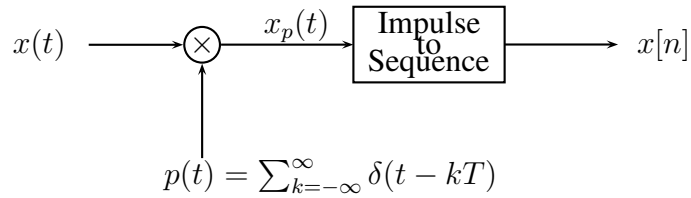

The Fourier transforms of $x(t)$, $x_p(t)$, and $x[n]$ are denoted respectively by $X(j\omega)$, $X_p(j\omega)$ and $X(e^{j\Omega})$.

Part a. If $X(j\omega)$ is as shown below and $T = 0.5 \times 10^{-3}$ sec, provide labeled sketches of $X_p(j\omega)$ and $X(e^{j\Omega})$.

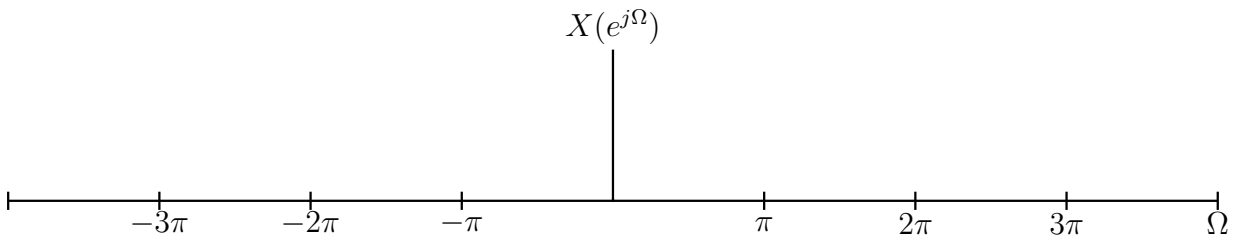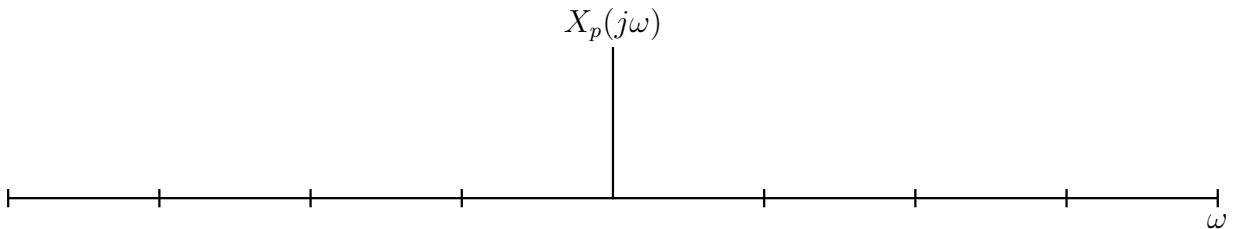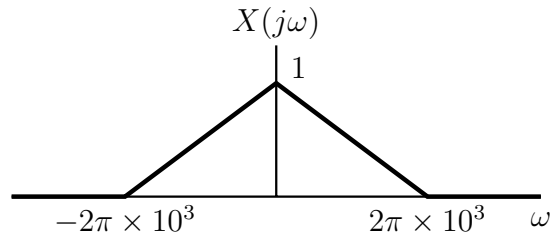

Work Page for Problem 4

Part b. Using the same $X(j\omega)$ and T as in **Part a**, determine

- (i) $\int_{-\infty}^{\infty} x(t)dt$
- (ii) $\sum_{n=-\infty}^{\infty} x[n]$.

$$\int_{-\infty}^{\infty} x(t)dt = \underline{\hspace{10cm}}, \quad \sum_{n=-\infty}^{\infty} x[n] = \underline{\hspace{10cm}}$$

Part c. Now, assume only that $x(t)$ is bandlimited, i.e., $X(j\omega) = 0$ for $|\omega| \geq W$ and is otherwise arbitrary.

It has been claimed that, for suitable values of T , i.e., $T < A$ for some value A , the total area under the continuous time input signal $x(t)$ is T times the sum of the $x[n]$. Do you believe the claim, i.e., is there any constraint between T and W which will **guarantee** that

$$T \sum_{n=-\infty}^{\infty} x[n] = \int_{-\infty}^{\infty} x(t)dt?$$

If your answer is yes, specify in terms of W , the smallest value of A for which the claim is true. If your answer is no, explain clearly.

YES

NO


$A = \underline{\hspace{10cm}}$

Explanation:

Work Space for Problem 4

PROBLEM 5 (30 pts)

Consider the following feedback system:

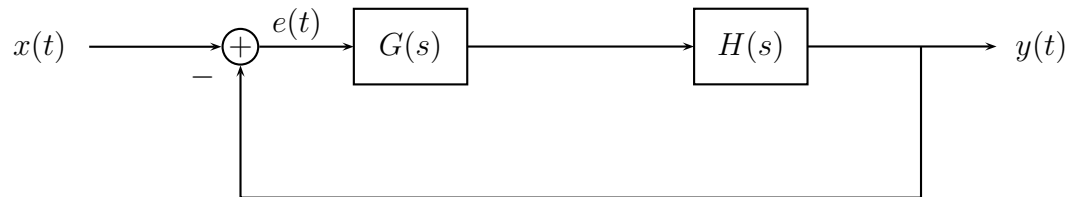

where $H(s) = \frac{1}{s^2}$ is the plant, $x(t)$ is the reference input, $e(t) = x(t) - y(t)$ is the error signal, and $y(t)$ is the output of the plant $H(s)$.

Part a. Is $H(s)$ stable ?

YES or **NO**

Brief explanation:

Part b. Find system functions $\frac{Y(s)}{X(s)}$ and $\frac{E(s)}{X(s)}$. Express your answers in terms of powers of s and $G(s)$.

$$\frac{Y(s)}{X(s)} = \underline{\hspace{15em}}$$

$$\frac{E(s)}{X(s)} = \underline{\hspace{15em}}$$

Work Page for Problem 5


Part c. Suppose $G(s) = K_d s + K_p$ where K_d and K_p are real numbers. Find the values of K_d and K_p such that the closed loop system is critically damped with undamped natural frequency of 10 rad/s.

$$K_d = \underline{\hspace{10em}}, \quad K_p = \underline{\hspace{10em}}$$

Work Page for Problem 5

PROBLEM 6 (25 pts)

Consider the DT LTI system whose unit sample response, $h[n]$ is shown below:


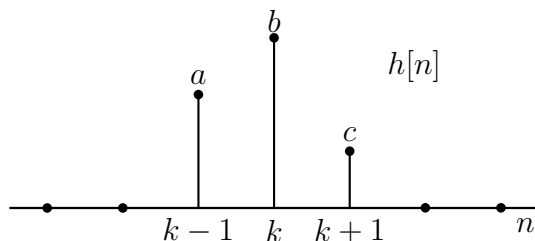


where k is an unknown integer and a , b , and c are unknown real numbers.

It is known that $h[n]$ satisfies the following conditions:

- (i) Let $H(e^{j\omega})$ be the Fourier transform of $h[n]$. $H(e^{j\omega})e^{j\omega}$ is real and even.
- (ii) If $x[n] = (-1)^n$ for all n , then $y[n] = 0$.
- (iii) If $x[n] = (\frac{1}{2})^n u[n]$ for all n , then $y[2] = \frac{9}{2}$.






Provide a labeled sketch of the output $y[n]$ when the input $x[n]$ is shown below. Your answer should not include a , b , c , nor k .

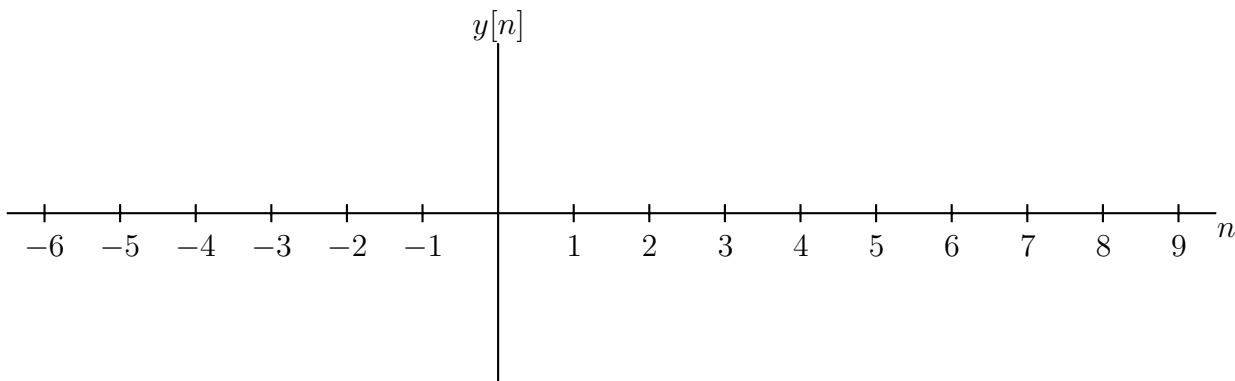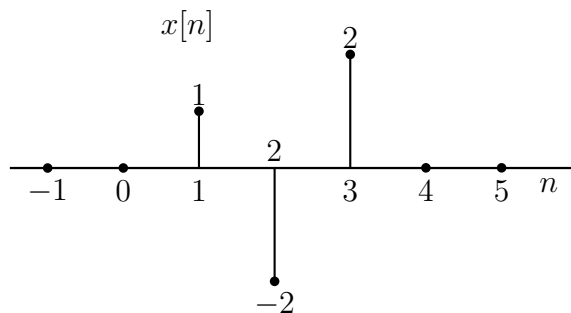

Work Space for Problem 6

PROBLEM 7 (35 pts)

Consider the five pole-zero plots below. Each plot corresponds to a DT LTI system function whose unit sample response is real. Each plot is drawn to scale. *Note that you have all the information to solve the questions in this problem although some of the poles and zeros are not labeled.* For your convenience, the identical pole-zero plots to the ones on this page are attached along with the transform tables.

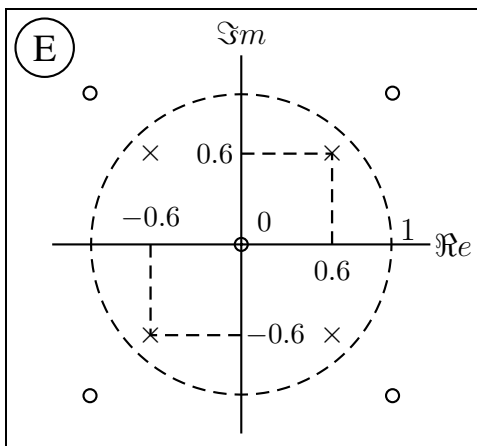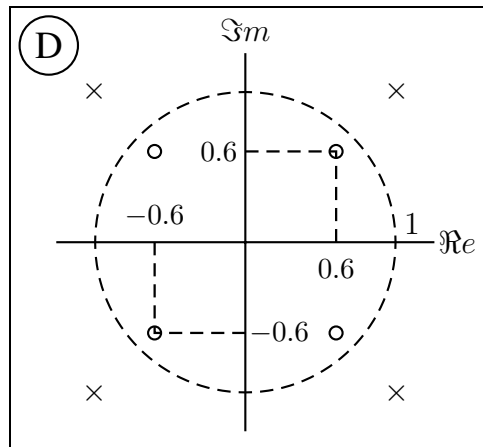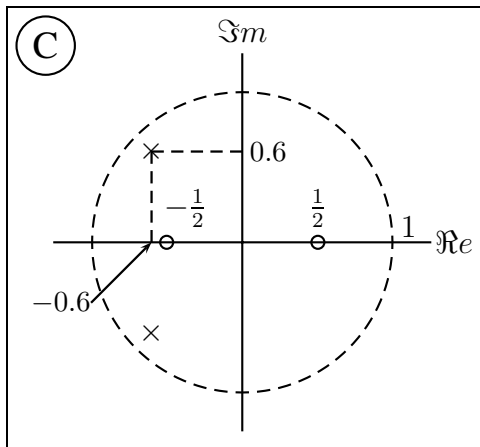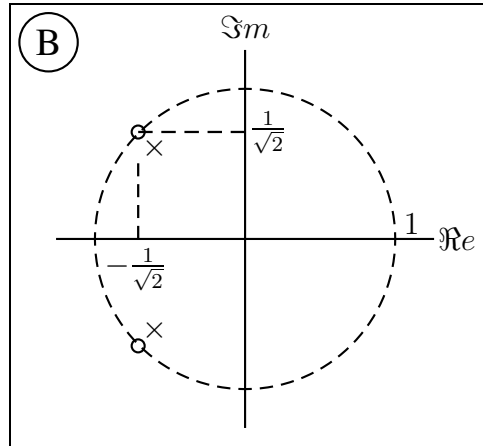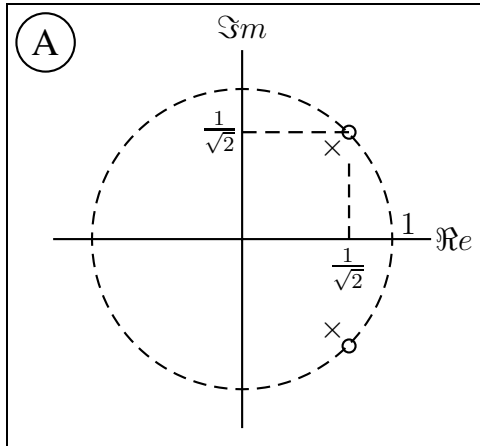


Part a. Which plot(s) can have an ROC so that it corresponds to a causal and stable system ?

Which plot(s) ?

Brief explanation:

Part b. Consider the following block diagram

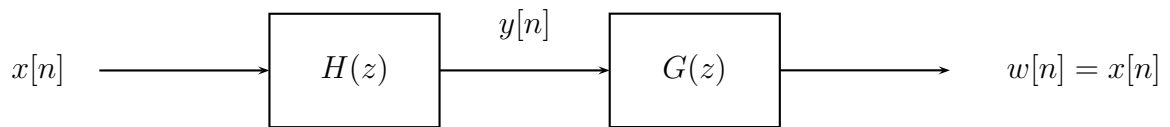

$H(z)$ is described by one or more of the pole-zero plots $A-E$. $G(z)$, which does not correspond to any of the pole-zero plots $A-E$, is a system such that $w[n] = x[n]$. Which plot(s) corresponds to $H(z)$ such that both $H(z)$ and $G(z)$ are causal and stable ?


Which plot(s) ?

Brief explanation:


Work Page for Problem 7

Work Space for Problem 7

Part c. Consider the following system with $T = \frac{1}{480}$ sec.

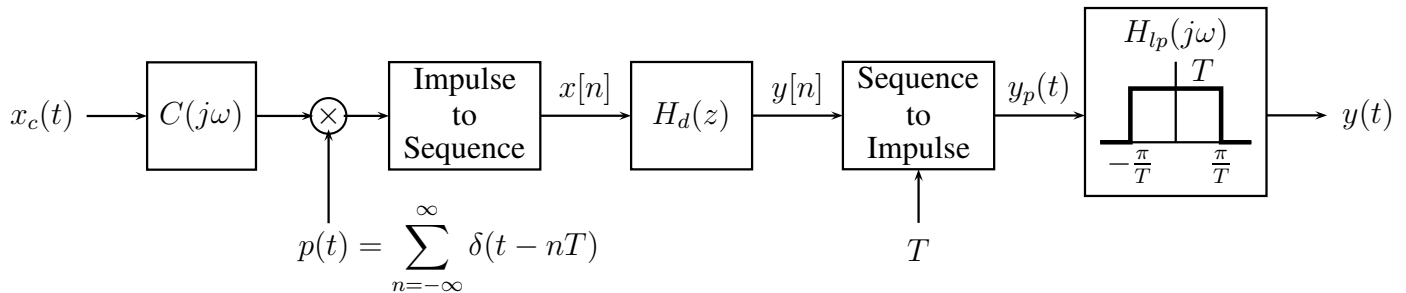

- (i) Plot the frequency response $C(j\omega)$ such that the entire system is LTI with the largest possible bandwidth.

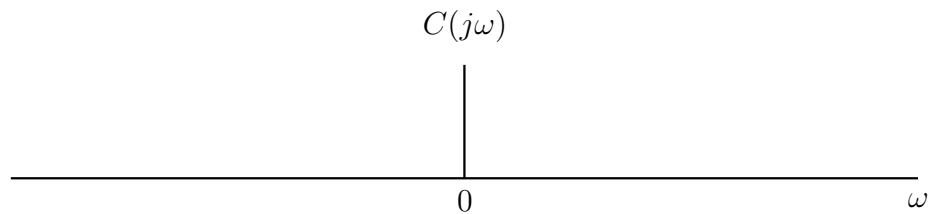

- (ii) Assume that $C(j\omega)$ is 1 for all ω and $x_c(t)$ is sufficiently band-limited so that the Nyquist criteria is met. $x_c(t)$ consists of the superposition of $s(t)$ which is the signal you are interested in and a 60Hz sinusoidal interference, i.e.,

$$x_c(t) = s(t) + \cos(2\pi \cdot 60t).$$

Which pole-zero plot corresponds to the best choice for $H_d(z)$ such that $|Y(j\omega)|$, the magnitude of the Fourier transform of the overall output $y(t)$ is approximately equal to $|S(j\omega)|$, the magnitude of the Fourier transform of $s(t)$?

Which plot ?

Brief explanation:

Work Page for Problem 7

Additional Work Page

There are no additional problems from this page on. Pages 34 to 37 are provided solely as additional work pages.

Additional Work Page

Additional Work Page

Additional Work Page