


Lecture D10 - Angular Impulse and Momentum

In addition to the equations of linear impulse and momentum considered in the previous lecture, there is a parallel set of equations that relate the angular impulse and momentum.

Angular Momentum

We consider a particle of mass, m , with velocity \mathbf{v} , moving under the influence of a force \mathbf{F} . The angular momentum about point O is defined as the “moment” of the particle’s linear momentum, \mathbf{L} , about O .

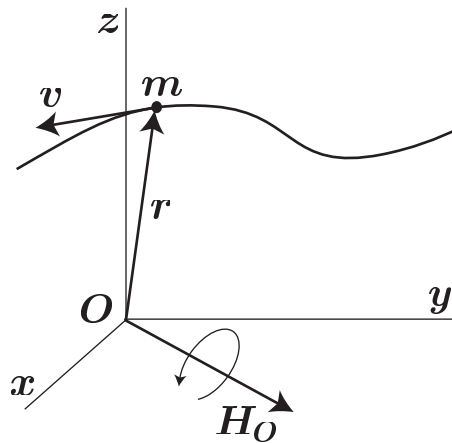


Thus, the particle’s angular momentum is given by,

$$\mathbf{H}_O = \mathbf{r} \times m\mathbf{v} = \mathbf{r} \times \mathbf{L} . \quad (1)$$

The units for the angular momentum are $\text{kg}\cdot\text{m}^2/\text{s}$ in the SI system, and $\text{slug}\cdot\text{ft}^2/\text{s}$ in the English system.

Using a right handed cartesian coordinate system, the components of the angular momentum are calculated as

$$\mathbf{H}_O = H_x\mathbf{i} + H_y\mathbf{j} + H_z\mathbf{k} = m \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ x & y & z \\ v_x & v_y & v_z \end{vmatrix} = m(v_zy - v_yz)\mathbf{i} + m(v_xz - v_zx)\mathbf{j} + m(v_yx - v_xy)\mathbf{k} .$$

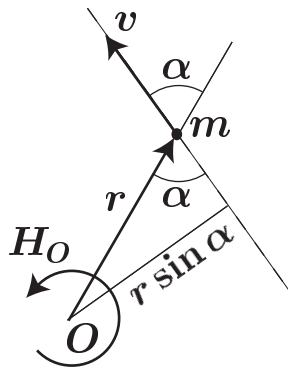

It is clear from its definition that the angular momentum is a vector which is perpendicular to the plane defined by \mathbf{r} and \mathbf{v} . Thus, in some occasions it may be more convenient to determine the direction of \mathbf{H}_O from the right hand rule, and its modulus directly from the definition of the vector product as

$$H_O = mvr \sin \alpha ,$$

where α is the angle between \mathbf{r} and \mathbf{v} .

Rate of Change of Angular Momentum

We now want to examine how the angular momentum changes with time. Taking a time derivative of expression (1), we have

$$\dot{\mathbf{H}}_O = \dot{\mathbf{r}} \times m\mathbf{v} + \mathbf{r} \times m\dot{\mathbf{v}} .$$

Here, we have assumed that m is constant. If O is a fixed point, then $\dot{\mathbf{r}} = \mathbf{v}$ and $\dot{\mathbf{r}} \times m\mathbf{v} = 0$. Thus, we end up with,

$$\dot{\mathbf{H}}_O = \mathbf{r} \times m\dot{\mathbf{v}} = \mathbf{r} \times m\mathbf{a} .$$

Applying Newton's second law to the right hand side of the above equation, we have that $\mathbf{r} \times m\mathbf{a} = \mathbf{r} \times \mathbf{F} = \mathbf{M}_O$, where \mathbf{M}_O is the moment of the force \mathbf{F} about point O . The equation expressing the rate of change of angular momentum is then written as


$$\mathbf{M}_O = \dot{\mathbf{H}}_O . \tag{2}$$

We note that this expression is valid whenever point O is fixed. The above equation is analogous to the equation derived in the previous lecture expressing the rate of change of linear momentum. It states that the rate of change of linear momentum about a fixed point O is equal to the moment about O due to the resultant force acting on the particle. Since this is a vector equation, it must be satisfied for each component independently. Thus, if the force acting on a particle is such that the component of its moment along a given direction is zero, then the component of the angular momentum along this direction will remain constant.

Example

Pendulum

Here, we revisit the simple pendulum problem introduced in lecture D6 and re-derive the pendulum equation using equation (2).

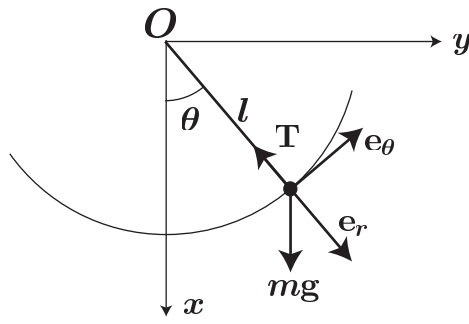

There are two forces acting on the suspended mass: the string tension, T , is parallel to the position vector r and therefore its moment about O is zero. On the other hand, the weight creates a moment about O which is $M_O = -lmg \sin \theta \mathbf{k}$.

The angular momentum is given by

$$\mathbf{H}_O = \mathbf{r} \times m\mathbf{v} = l\mathbf{e}_r \times ml\dot{\theta}\mathbf{e}_\theta = ml^2\dot{\theta} \mathbf{e}_r \times \mathbf{e}_\theta = ml^2\dot{\theta}\mathbf{k}.$$

Therefore, the z component of equation (2) gives

$$ml^2\ddot{\theta} = -lmg \sin \theta ,$$

or,

$$\ddot{\theta} + \frac{g}{l} \sin \theta = 0 ,$$

which is precisely the same equation as the one derived in lecture D6.

Principle of Angular Impulse and Momentum

Equation (2) gives us the instantaneous relation between the moment and the time rate of change of angular momentum. Imagine now that the force considered acts on a particle between time t_1 and time t_2 . Equation (2) can then be integrated in time to obtain

$$\int_{t_1}^{t_2} \mathbf{M}_O dt = \int_{t_1}^{t_2} \dot{\mathbf{H}}_O dt = (\mathbf{H}_O)_2 - (\mathbf{H}_O)_1 = \Delta\mathbf{H}_O . \quad (3)$$

Here, $(\mathbf{H}_O)_1 = \mathbf{H}_O(t_1)$ and $(\mathbf{H}_O)_2 = \mathbf{H}_O(t_2)$. The term

$$\int_{t_1}^{t_2} \mathbf{M}_O dt ,$$

is called the *angular impulse*. Thus, the angular impulse on a particle is equal to the angular momentum change.

Equation (3) is particularly useful when we are dealing with impulsive forces. In such cases, it is often possible to calculate the integrated effect of a force on a particle without knowing in detail the actual value of the force as a function of time.

Conservation of Angular Momentum

We see from equation (1) that if the moment of the resultant force on a particle is zero during an interval of time, then its angular momentum \mathbf{H}_O must remain constant.


Consider now two particles m_a and m_b which interact during an interval of time. Assume that interaction forces between them are the only unbalanced forces on the particles that have a non-zero moment about a fixed point O . Let \mathbf{F} be the interaction force that particle m_b exerts on particle m_a . Then, according to Newton's third law, the interaction force that particle m_a exerts on particle m_b will be $-\mathbf{F}$. Using expression (3), we will have that $\Delta(\mathbf{H}_O)_a = -\Delta(\mathbf{H}_O)_b$, or $\Delta\mathbf{H}_O = \Delta(\mathbf{H}_O)_a + \Delta(\mathbf{H}_O)_b = \mathbf{0}$. That is, the changes in angular momentum of particles m_a and m_b are equal in magnitude and of opposite sign, and the total angular momentum change equals zero. Recall that this is true only if the unbalanced forces, those with non-zero moment about O , are the interaction forces between the particles. The more general situation in which external forces can be present will be considered in future lectures.

We note that the above argument is also valid in a componentwise sense. That is, when two particles interact and there are no external unbalanced moments along a given direction, then the total angular momentum change along that direction must be zero.

Example

Ball on a cylinder

A particle of mass m is released on the smooth inside wall of an open cylindrical surface with a velocity \mathbf{v}_0 that makes an angle α with the horizontal tangent. The gravity acceleration is pointing downwards. We want to obtain : i) an expression for the largest magnitude of \mathbf{v}_0 that will prevent the particle from leaving the cylinder through the top end, and ii) an expression for the angle β that the velocity vector will form with the horizontal tangent, as a function of b .

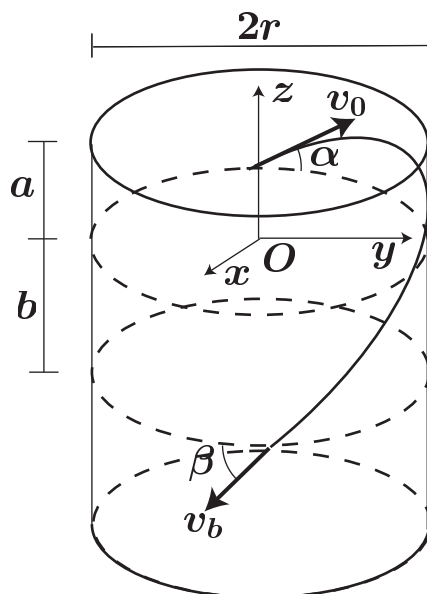

The only forces on the particle are gravity and the normal force from the cylinder surface. The moment of

these forces about O (or, in fact, about any point on the axis of the cylinder) always has a zero component in the z direction. That is, $(M_O)_z = 0$. To see that, we notice that for any point on the surface of the cylinder, \mathbf{r} and \mathbf{F} are always contained in a vertical plane that contains the z axis. Therefore, the moment must be normal to that plane. Since the moment has zero component in the z direction, $(H_O)_z$ will be constant. Thus, we have that

$$(H_O)_z = rmv_0 \cos \alpha = \text{constant} .$$

For part i), we consider the trajectory for which the velocity is horizontal when $z = a$ and let $(v_0)_{\text{limit}}$ be the initial velocity that corresponds to this trajectory. It is clear that for any trajectory for which v_0 has a larger magnitude than $(v_0)_{\text{limit}}$, the particle will leave the cylinder through the top end. Thus, for the limit trajectory we have, from conservation of energy

$$\frac{1}{2}m(v_0)_{\text{limit}}^2 = \frac{1}{2}mv_a^2 + mga ,$$

and from conservation of angular momentum

$$(H_O)_z = rm(v_0)_{\text{limit}} \cos \alpha = rmv_a .$$

Here, v_a is the magnitude of the velocity for the limit trajectory when $z = a$. Eliminating v_a from these equations we finally arrive at,

$$(v_0)_{\text{limit}} = \sqrt{\frac{2ga}{1 - \cos^2 \alpha}} .$$

Therefore, for $v_0 \leq (v_0)_{\text{limit}}$ the mass will not leave the cylinder through the top end.

For part ii), we also consider conservation of energy

$$\frac{1}{2}mv_0^2 = \frac{1}{2}mv_b^2 - mgb$$

and conservation of angular momentum,

$$rmv_0 \cos \alpha = rmv_b \cos \beta .$$


Eliminating, v_b from these two expressions we obtain,

$$\beta = \cos^{-1} \left(\frac{\cos \alpha}{\sqrt{1 + 2gb/v_0^2}} \right) .$$

Example

Spinning Mass

A small particle of mass m and its restraining cord are spinning with an angular velocity ω on the horizontal surface of a smooth disk, shown in section. As the force \mathbf{F}_s is slowly increased, r decreases and ω changes. Initially, the mass is spinning with ω_0 and r_0 . Determine : i) an expression for ω as a function of r , and ii) the work done on the particle by \mathbf{F}_s between r_0 and an arbitrary r , and verify the principle of work and energy.

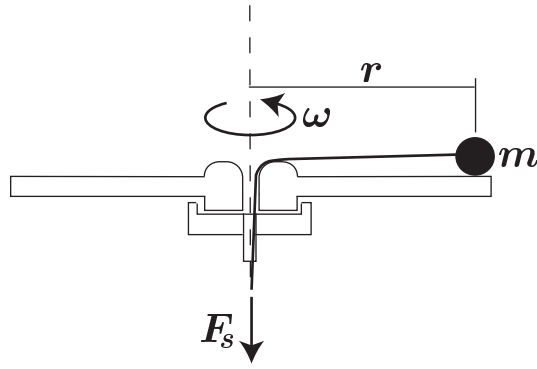

The component, along the spinning axis, of moment of the forces acting on the particle is zero. Therefore, the vertical component of the angular momentum will be constant. For i), we have

$$mr_0v_0 = mrv, \quad v_0 = \omega_0r_0, \quad v = \omega r \quad \rightarrow \quad \omega = \frac{r_0^2\omega_0}{r^2}.$$

For ii), we first calculate the force on the string

$$F_s = -m\frac{v^2}{r} = -m\frac{r^2\omega^2}{r} = -m\frac{r_0^4\omega_0^2}{r^3}.$$

The work done by F_s , will be

$$W = \int_{r_0}^r F_s dr = -mr_0^4\omega_0^2 \int_{r_0}^r \frac{dr}{r^3} = mr_0^4\omega_0^2 \frac{1}{2} \left(\frac{1}{r^2} - \frac{1}{r_0^2} \right).$$

The energy balance implies that

$$T_0 + W = T.$$


This expression can be directly verified since,

$$\underbrace{\frac{1}{2}m(\omega_0r_0)^2}_{T_0} + \underbrace{\frac{1}{2}m(\omega_0r_0)^2 \left(\frac{r_0^2}{r^2} - 1 \right)}_W = \underbrace{\frac{1}{2}m(\omega r)^2}_T.$$

Example

Ballistic Pendulum

We consider a pendulum consisting of a mass, M , suspended by a *rigid* rod of length L . The pendulum is initially at rest and the mass of the rod can be neglected. A bullet of mass m and velocity \mathbf{v}_0 impacts M and stays embedded in it. We want to find out the angle θ_{\max} reached by the pendulum. The angle that the velocity vector \mathbf{v}_0 forms with the horizontal is α .

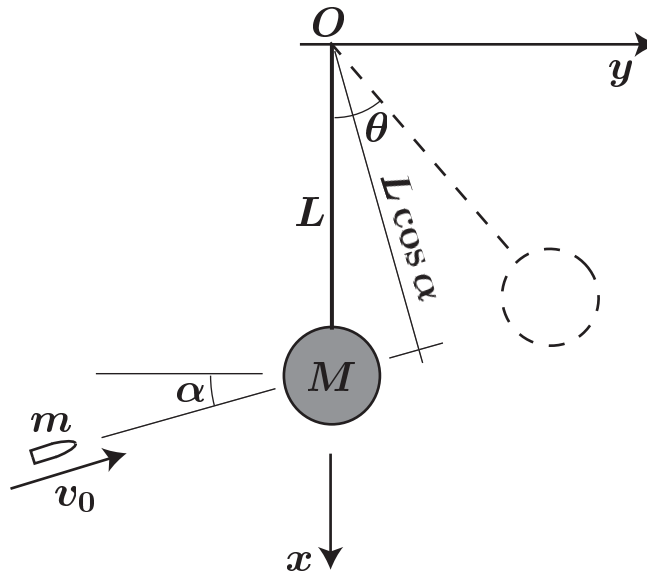

Because the rod is assumed to be rigid, we can expect that when the bullet impacts the mass, there will be an impulsive reaction that the rod will exert on the bullet. If we use the principle of linear impulse and momentum, it will be necessary to solve for this impulsive force. An alternative approach that simplifies the problem considerably is to use the principle of angular impulse and momentum. We consider the angular momentum about point O of the particles m and M just before and after the impact. The only external forces acting on the two particles are gravity and the reaction from the rod. It turns out that gravity is not an impulsive force and therefore its effect on the total angular impulse, over a very short time interval, can be safely neglected (it turns out that in this case, the moment about O of the gravity forces at the time of impact is also zero). On the other hand, we can expect the reaction from the rod to be large. However, the moment about O of this reaction is zero, since it is directed in the direction of the rod. Therefore, we have that during impact, the z component of the angular momentum is conserved.

The angular momentum before impact will be,

$$[(H_O)_z]_1 = L \cos \alpha m v_0 .$$

After impact, the velocity v_1 has to be horizontal. Thus, the angular momentum will be

$$[(H_O)_z]_2 = L(M + m)v_1 .$$

Equating these two expressions we get,

$$v_1 = \frac{m}{M + m} v_0 \cos \alpha .$$

After impact, the system is conservative, and the maximum height can be easily obtained from conservation of energy,

$$\frac{1}{2}(M + m)v_1^2 = (M + m)gL(1 - \cos \theta_{\max}) .$$

Thus,

$$\theta_{\max} = \cos^{-1} \left(1 - \left(\frac{m}{(M+m)} \right)^2 \frac{v_0^2 \cos^2 \alpha}{2gL} \right).$$

ADDITIONAL READING

J.L. Meriam and L.G. Kraige, *Engineering Mechanics, DYNAMICS*, 5th Edition

3/10