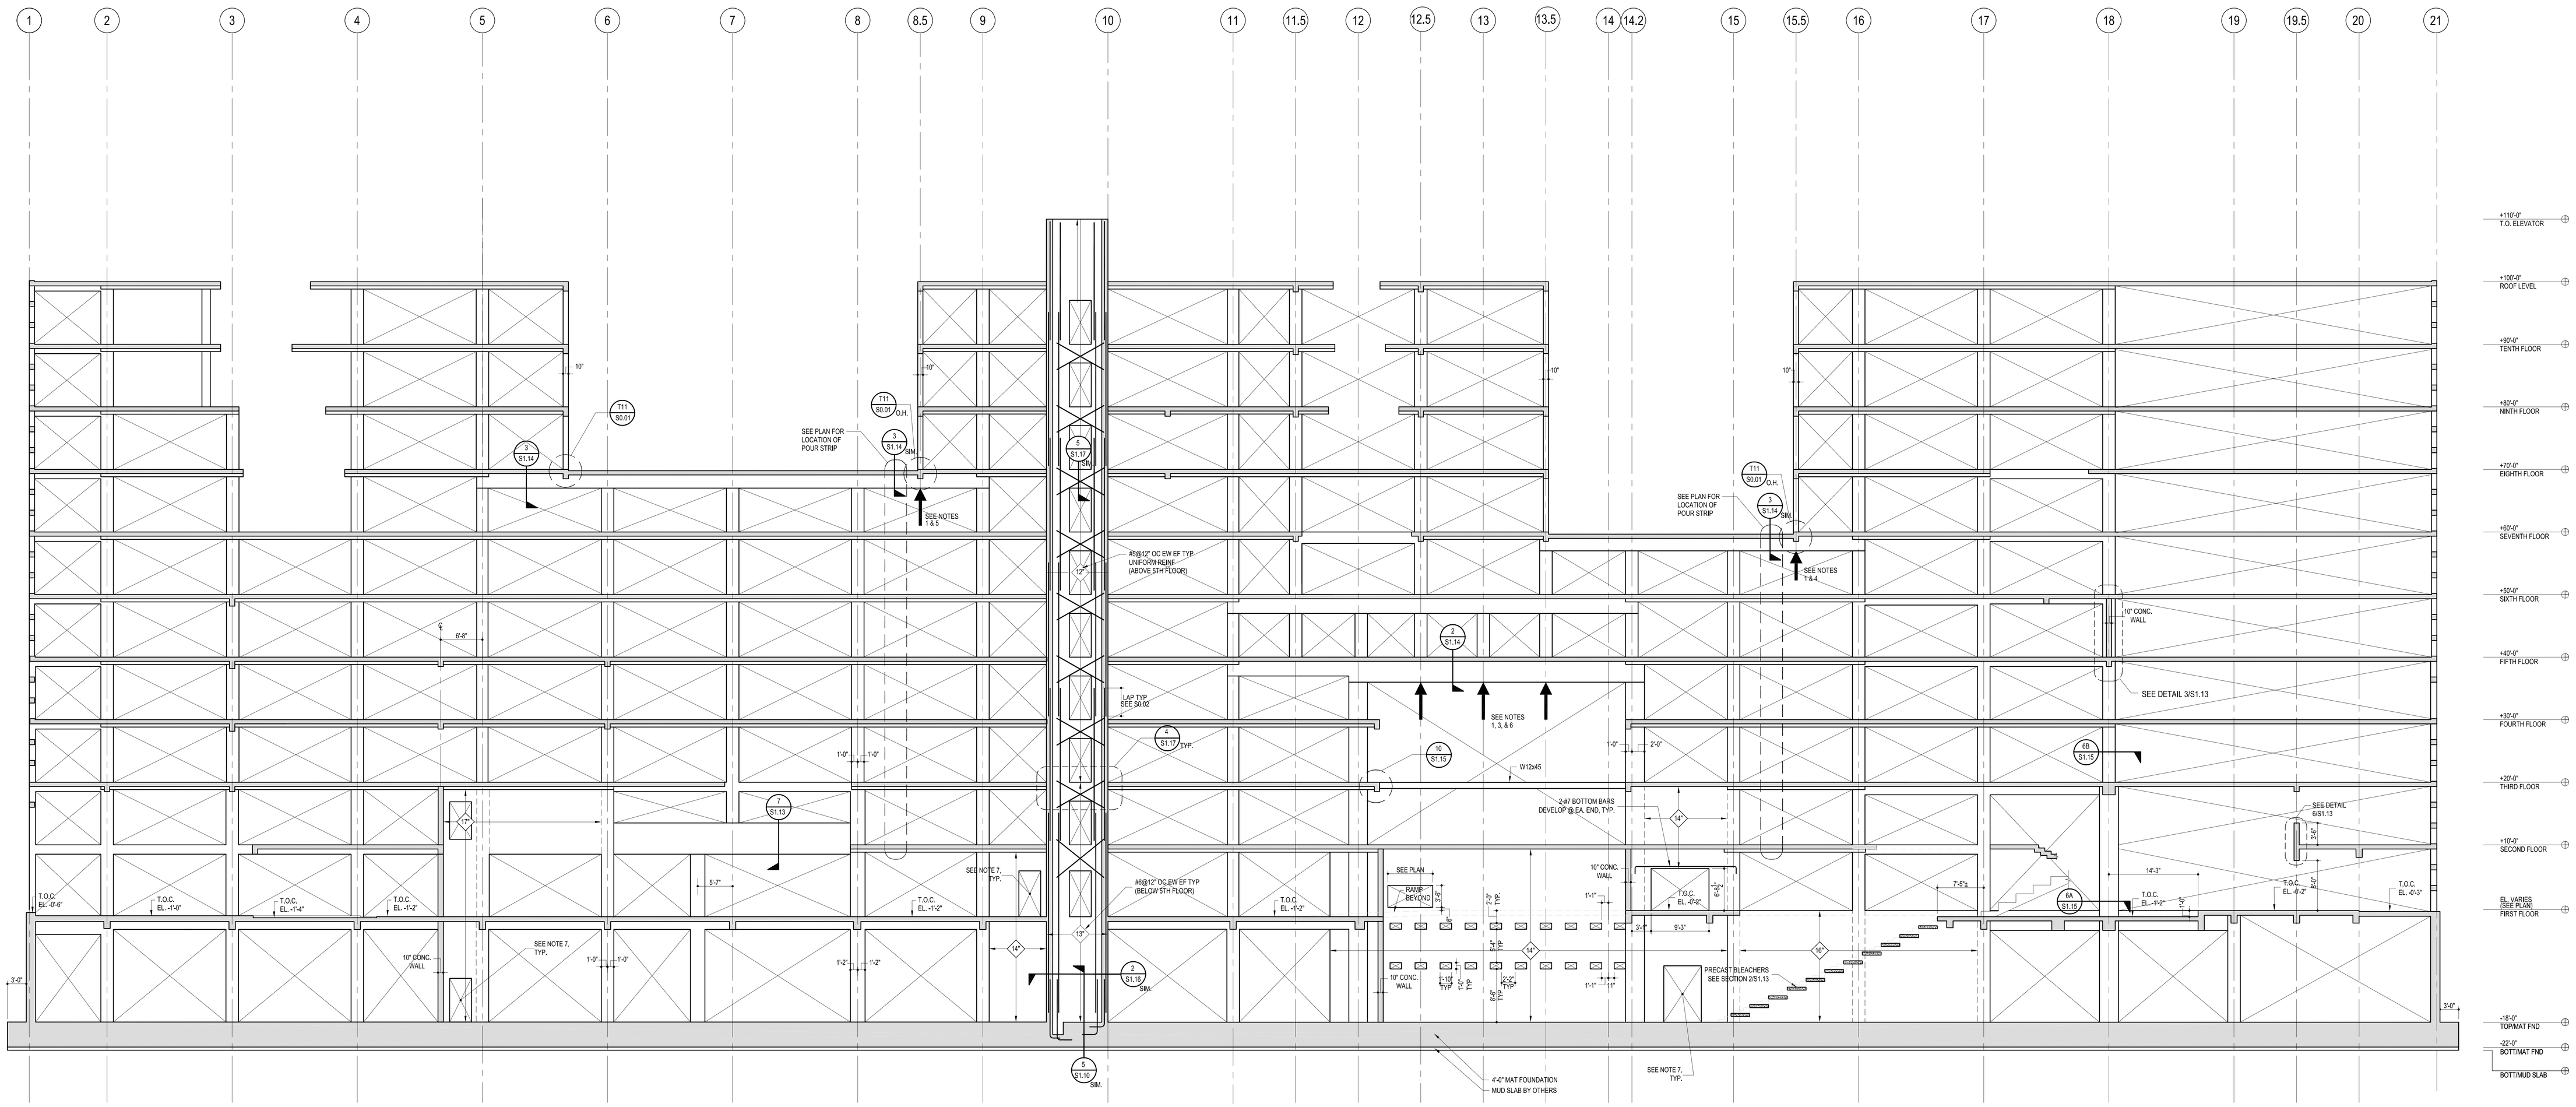

NOTES:

1. CONTRACTOR SHALL BE RESPONSIBLE FOR TEMP SHORING OF ALL ELEMENTS TO ENSURE STRUCTURAL STABILITY AT ALL TIMES DURING CONSTRUCTION. IN MANY CASES, SHORING WILL BE REQUIRED TO STAY IN PLACE FOR EXTENDED PERIODS OF TIME UNTIL PERMANENT LOAD-CARRYING STRUCTURE ABOVE HAS BEEN CAST & CURED. SHORING LOCATIONS SHOWN HERE ATTEMPT TO SHOW CRITICAL AREAS REQUIRING SHORING; HOWEVER, BY NO MEANS HAVE WE ATTEMPTED TO SHOW EVERY LOCATION WHERE SHORING IS REQUIRED.
2. SHORING SHALL REMAIN IN PLACE UNTIL FIFTH FLOOR SLAB HAS BEEN CAST & CURED FOR A MINIMUM OF 28 DAYS OR REACHED 100% OF ITS DESIGN COMPRESSIVE STRENGTH.
3. SHORING SHALL REMAIN IN PLACE UNTIL SEVENTH FLOOR SLAB HAS BEEN CAST & CURED FOR A MINIMUM OF 28 DAYS OR REACHED 100% OF ITS DESIGN COMPRESSIVE STRENGTH.
4. SHORING SHALL REMAIN IN PLACE UNTIL POUR STRIPS ON SEVENTH FLOOR HAVE BEEN CAST AND CURED FOR A MINIMUM OF 28 DAYS OR REACHED 100% OF ITS DESIGN COMPRESSIVE STRENGTH.
5. SHORING SHALL REMAIN IN PLACE UNTIL POUR STRIPS ON EIGHTH FLOOR HAVE BEEN CAST AND CURED FOR A MINIMUM OF 28 DAYS OR REACHED 100% OF ITS DESIGN COMPRESSIVE STRENGTH.
6. TRANSFER BEAMS & VIERENDEELS SHALL BE CAMBERED AS SHOWN ON THE FLOOR PLANS.
7. SEE ARCHITECTURAL DRAWINGS FOR EXACT SIZES AND LOCATIONS OF WALL OPENINGS NOT SHOWN. SEE T13/S0.02 FOR REINF. DETAILS AROUND OPENINGS.

F FRAMING ELEVATION LINE B

FIRE PUMP ENGINEERS:
R. G. VANDERWEIL ENGINEERS, INC.
274 SUMMER STREET
BOSTON, MA 02210-1123
617 423-7423 FAX 617 350-7186

SECURITY CONSULTANTS:
KROLL SCHIFF AND ASSOCIATES
1025 MAIN STREET
BASTROP, TX 78602
512 321-4421 FAX 512 321-1746

FOOD SERVICE CONSULTANTS:
CINI-LITTLE, INC.
305 MADISON AVENUE, ROOM 2234
NEW YORK, NY 10165-0006
212 297-0292 FAX 212 297-0387

M/E/P ENGINEERS:
OVE ARUP & PARTNERS
955 MASSACHUSETTS AVENUE
CAMBRIDGE, MA 02139
617 864-2987 FAX 617 864-6178

ASSOCIATE STRUCTURAL ENGINEER:
SIMPSON GUMPERTZ & HEGER, INC.
297 BROADWAY
ARLINGTON, MA 02174-5310
781 643-2000 FAX 781 643-2009
SGH @ SGH . COM

STRUCTURAL ENGINEER:
GUY NORDENSON AND ASSOCIATES LLP
198 BROADWAY, 10TH FLOOR
NEW YORK, NY 10038
212 766-9119 FAX 212 766 9016
MAIL @ NORDENSON . COM

CIVIL ENGINEERS:
SEA CONSULTANTS, INC.
485 MASSACHUSETTS AVENUE
CAMBRIDGE, MA 02139
617 497-7800 FAX 617 498-4692

SURVEYOR:
CULLINAN ENGINEERING CO
400 COMMONWEALTH AVE, 3RD FL
BOSTON, MA 02215
617 536-8070 FAX 617 536-8095
CULLINAN20 @ AOL . COM

ASSOCIATE ARCHITECT:
PERRY DEAN ROGERS & PARTNERS
177 MILK STREET
BOSTON, MA 02109
617 423-0100 FAX 617 426-2274

ARCHITECT:
STEVEN HOLL ARCHITECTS
450 WEST 31ST STREET, 11TH FL
NEW YORK, NEW YORK 10001
212 629-7352 FAX 212 629-7312
MAIL @ STEVENHOLL . COM

STAMP:

NO.	DATE	REVISION

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
UNDERGRADUATE RESIDENCE 2001
BUILDING W69
229 VASSAR STREET
CAMBRIDGE, MA 02139
MIT PROJECT #98171

DATE	JOB NO.	DRAWING FILE
10.16.00	99147.01	S2-02.DWG
SCALE	DRAWN BY	CHECKED BY
1/8"=1'-0"	KMG	JHT/JCP

TITLE: FRAMING ELEVATION AT GRID B

SECTION: S

DRAWING NO. 2.02

Courtesy of James Parker and Amy Stern. Used with permission.

L:\1999\99147.01\...\S2.02